



INDUCTION HEATED HOTPLATE

- Hotplate operating temperatures up to 340°C
- Suitable for all cooking requirements
- Rapid heating
- Much improved thermal efficiency - 84 % efficient in recent US Dept of Energy research (compared to ~ 40 % for gas cookers)
- Operator friendly
- Safe and hygienic




Petrie

INDUCTION HEATED HOTPLATE


Petrie's induction heated hotplate is ideal for the development of products that are traditionally cooked using gas based systems. The principle of induction heating is that an alternating electrical current is passed through a metal coil thereby generating a changing magnetic field. The magnetic field then passes through the metal object to be heated and produces an electric current in the body. Since the metal body has little resistance it heats up due to resistance heating.

Efficient and uniform heating is the result of the design of the metal coils and consistent power supply.

When coupled with a microwave / steam process, this can form part of a continuous stir-frying process, delivering accurate and precise amounts of heat to food ingredients at very rapid rates. The process can be described as a series of 'WOK' zones arranged sequentially on a continuous flat bed, each of which is heated appropriately to the required end product. The combined effect can overcome problems such as irregular heating that is encountered with gas based methods.

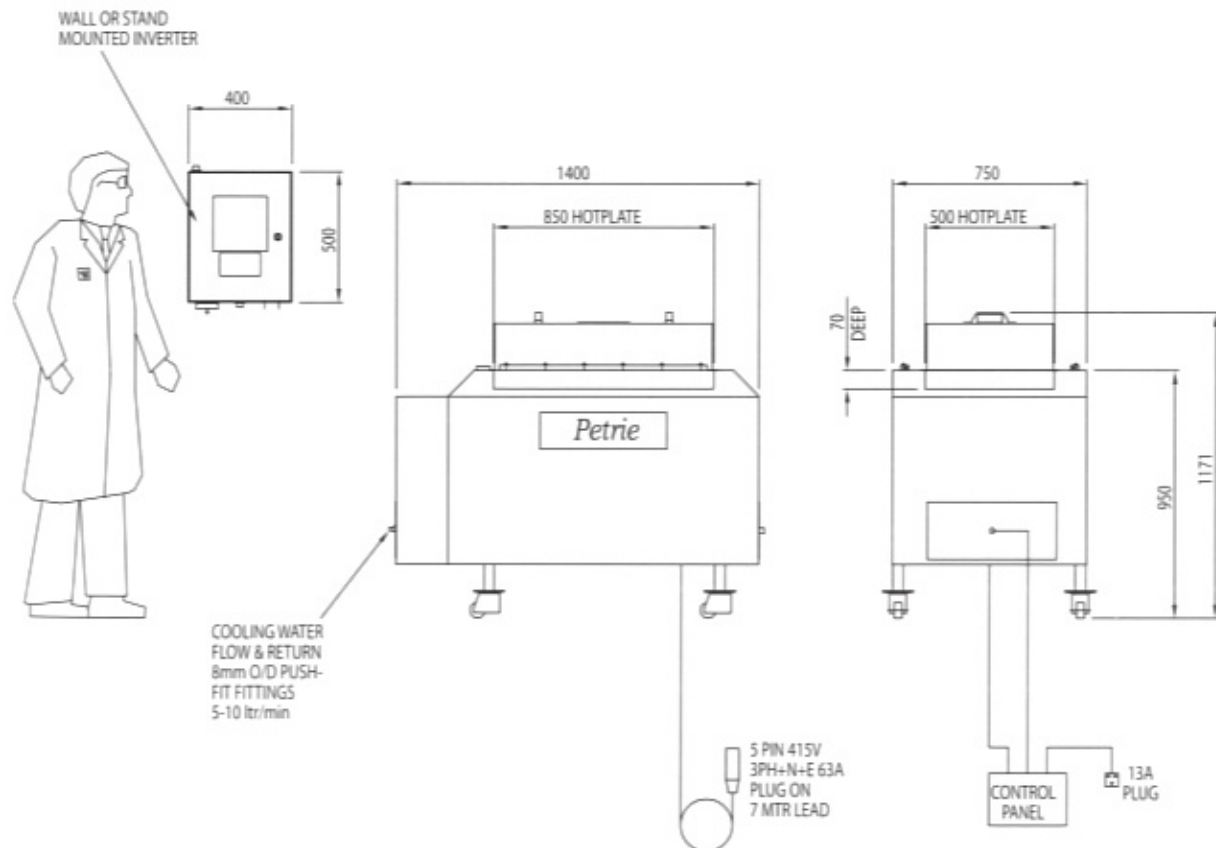

Hotplate Size (working area)	0.85m x 0.5m (0.425m ²)
Approximate Weight	300kg
Installed Power	24kW - 60kVA.
Nominal maximum mains current	35 Amps
Electrical connections	415V, 3 phase via 5 pin 63 amp plug (supplied with 7m of cable) 240 V, Single phase (3 amp) for control unit
Cooling water requirements	Minimum 5 litres/min of clean water in the range of 20 to 40°C
Operating Frequency	20kHz
Maximum operating temperature	350°C (dependent upon the flashpoint of oil)

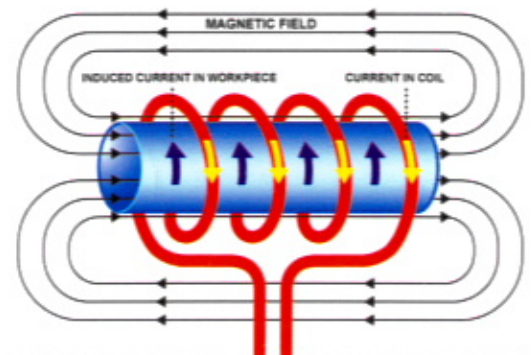

For further details on our Induction Heated Hotplate, contact:

BCH Limited

Spring Place, Millfold, Whitworth, Lancs, England, OL12 8DN

Tel: +44 (0) 1706 85 2122 Fax: +44 (0) 1706 85 3629

Email: info@bchltd.com Website: www.bchltd.com

